AERODROME ELEVATION 2926 FT.
DISTANCES IN METRES.
ELEVATIONS IN FEET (EGM-08).
GRID LINES AND CO-ORDINATES SHOWN ARE BASED ON WGS-84 DATUM.

AERODROME OBSTACLE CHART
TYPE-B

BARAPANI,INDIA
BARAPANI AIRPORT

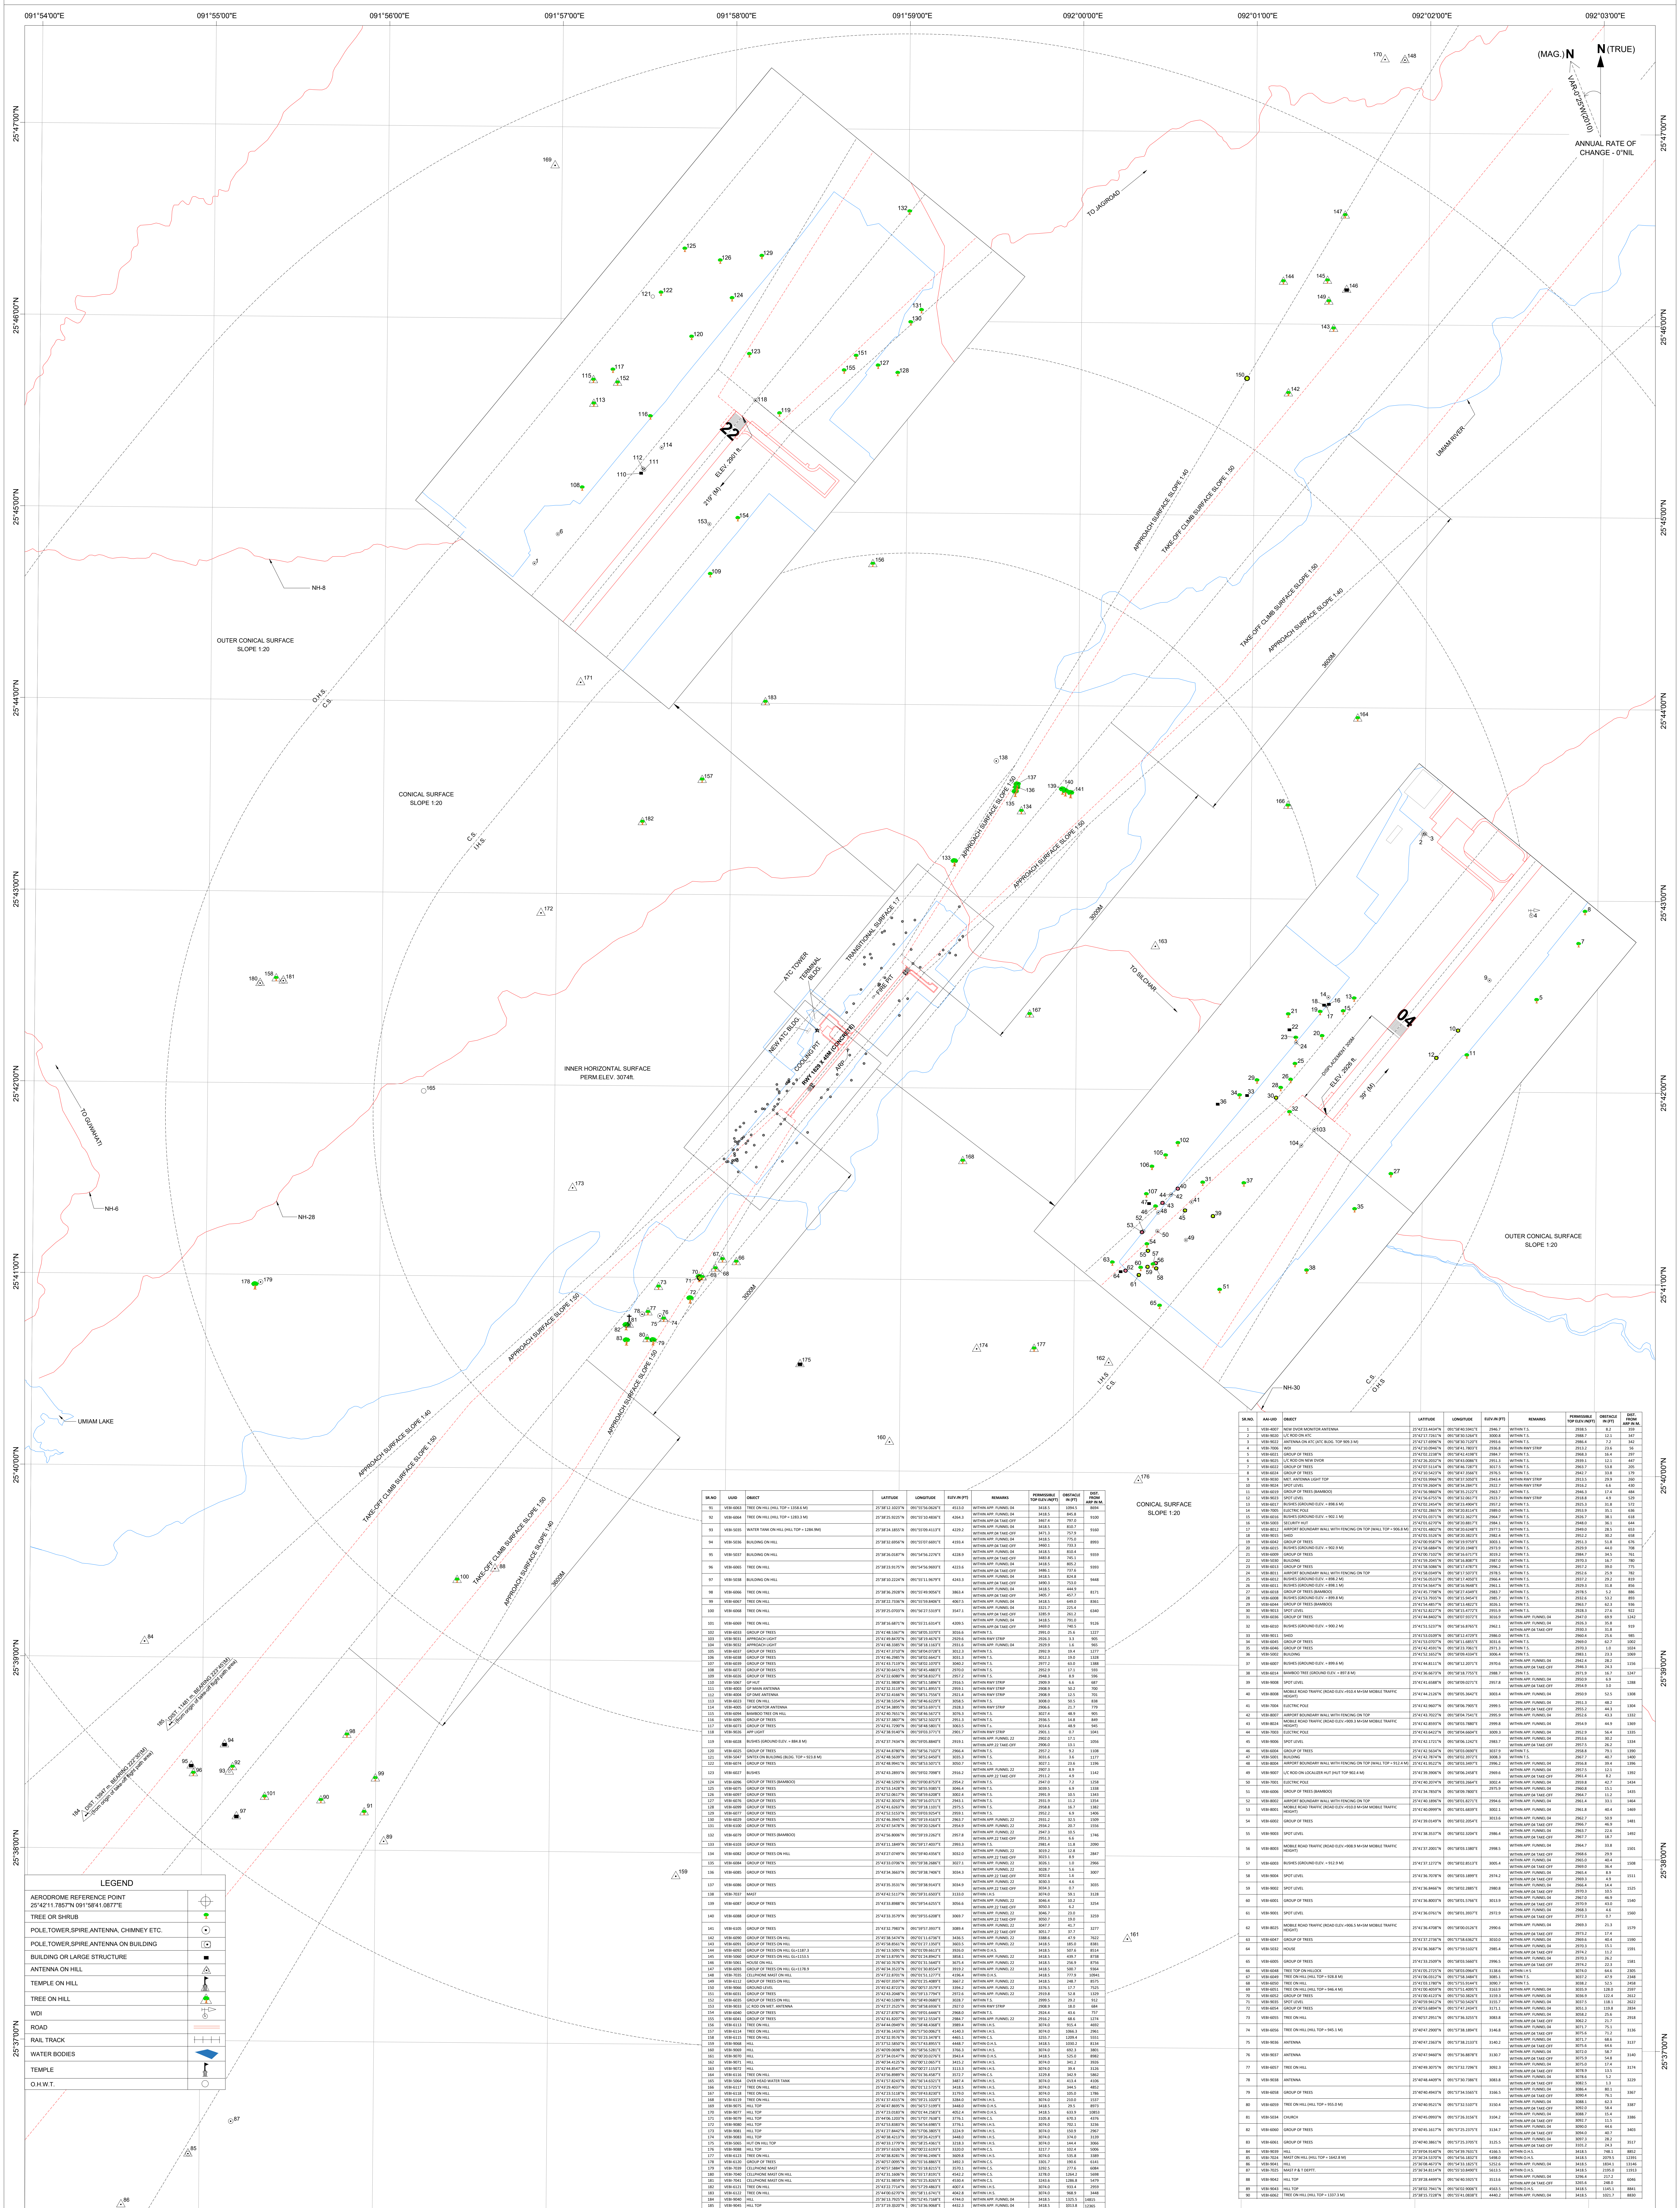

SR.NO.	AAI-UID	OBJECT	LATITUDE	LONGITUDE	ELEV.IN (FT)	REMARKS	PERMISSIBLE TOP ELEV.IN(FT)	OBSTACLE IN (FT)	DIST. FROM ARP IN M.
1	VEBI-4007	NEW DVOR MONITOR ANTENNA	25°42'23.4434"N	091°58'40.5941"E	2946.7	WITHIN T.S.	2938.5	8.2	359
2	VEBI-9020	L/C ROD ON ATC	25°42'17.7261"N	091°58'30.5264"E	3000.8	WITHIN T.S.	2988.7	12.1	347
3	VEBI-9022	ANTENNA ON ATC (ATC BLDG. TOP 909.3 M)	25°42'17.6996"N	091°58'30.7120"E	2993.6	WITHIN T.S.	2986.4	7.2	342
4	VEBI-7006	WDI	25°42'10.0946"N	091°58'41.7803"E	2936.8	WITHIN RWY STRIP	2913.2	23.6	56
5	VEBI-6021	GROUP OF TREES	25°42'02.2238"N	091°58'42.4198"E	2984.7	WITHIN T.S.	2968.3	16.4	297
6	VEBI-9025	L/C ROD ON NEW DVOR	25°42'26.2032"N	091°58'43.0086"E	2951.3	WITHIN T.S.	2939.1	12.1	447
7	VEBI-6022	GROUP OF TREES	25°42'07.5114"N	091°58'46.7287"E	3017.5	WITHIN T.S.	2963.7	53.8	205
8	VEBI-6024	GROUP OF TREES	25°42'10.5423"N	091°58'47.3566"E	2976.5	WITHIN T.S.	2942.7	33.8	179
9	VEBI-9030	MET. ANTENNA LIGHT TOP	25°42'03.9966"N	091°58'37.5050"E	2943.4	WITHIN RWY STRIP	2913.5	29.9	260
10	VEBI-9024	SPOT LEVEL	25°41'59.2604"N	091°58'34.2847"E	2922.7	WITHIN RWY STRIP	2916.2	6.6	430
11	VEBI-6019	GROUP OF TREES (BAMBOO)	25°41'56.9860"N	091°58'35.2122"E	2963.7	WITHIN T.S.	2946.3	17.4	484
12	VEBI-9023	SPOT LEVEL	25°41'56.6755"N	091°58'32.0617"E	2923.7	WITHIN RWY STRIP	2918.8	4.9	529
13	VEBI-6017	BUSHES (GROUND ELEV. = 898.6 M)	25°42'02.2454"N	091°58'23.4904"E	2957.2	WITHIN T.S.	2925.3	31.8	572
14	VEBI-7005	ELECTRIC POLE	25°42'02.2865"N	091°58'20.8114"E	2989.0	WITHIN T.S.	2953.9	35.1	636
15	VEBI-6016	BUSHES (GROUND ELEV. = 902.1 M)	25°42'01.0371"N	091°58'22.3627"E	2964.7	WITHIN T.S.	2926.7	38.1	618
16	VEBI-5003	SECURITY HUT	25°42'01.6270"N	091°58'20.8817"E	2984.1	WITHIN T.S.	2948.0	36.1	644
17	VEBI-8012	AIRPORT BOUNDARY WALL WITH FENCING ON TOP (WALL TOP = 906.8 M)	25°42'01.4802"N	091°58'20.6248"E	2977.5	WITHIN T.S.	2949.0	28.5	653
18	VEBI-9015	SHED	25°42'01.5526"N	091°58'20.3823"E	2982.4	WITHIN T.S.	2952.2	30.2	658
19	VEBI-6042	GROUP OF TREES	25°42'00.9587"N	091°58'19.9759"E	3003.1	WITHIN T.S.	2951.3	51.8	676
20	VEBI-6015	BUSHES (GROUND ELEV. = 902.9 M)	25°41'58.6884"N	091°58'20.1948"E	2973.9	WITHIN T.S.	2929.9	44.0	708
21	VEBI-6009	GROUP OF TREES	25°42'00.7102"N	091°58'16.6717"E	3019.2	WITHIN T.S.	2984.7	34.5	761
22	VEBI-5030	BUILDING	25°41'59.2045"N	091°58'16.8087"E	2987.0	WITHIN T.S.	2970.3	16.7	780
23	VEBI-6013	GROUP OF TREES	25°41'58.5086"N	091°58'17.4787"E	2996.2	WITHIN T.S.	2957.2	39.0	775
24	VEBI-8011	AIRPORT BOUNDARY WALL WITH FENCING ON TOP	25°41'58.0349"N	091°58'17.5073"E	2978.5	WITHIN T.S.	2952.6	25.9	782
25	VEBI-6012	BUSHES (GROUND ELEV. = 898.2 M)	25°41'56.0533"N	091°58'17.4050"E	2966.4	WITHIN T.S.	2937.2	29.2	819
26	VEBI-6011	BUSHES (GROUND ELEV. = 898.1 M)	25°41'54.5647"N	091°58'16.9648"E	2961.1	WITHIN T.S.	2929.3	31.8	856
27	VEBI-6018	GROUP OF TREES (BAMBOO)	25°41'45.7798"N	091°58'27.4349"E	2983.7	WITHIN T.S.	2978.5	5.2	886
28	VEBI-6008	BUSHES (GROUND ELEV. = 899.8 M)	25°41'53.7935"N	091°58'15.9454"E	2985.7	WITHIN T.S.	2932.6	53.2	893
29	VEBI-6044	GROUP OF TREES (BAMBOO)	25°41'54.4857"N	091°58'13.4822"E	3026.1	WITHIN T.S.	2963.7	62.3	936
30	VEBI-9013	SPOT LEVEL	25°41'52.8227"N	091°58'15.4772"E	2955.9	WITHIN T.S.	2928.3	27.6	922
31	VEBI-6036	GROUP OF TREES	25°41'44.8402"N	091°58'07.9372"E	3016.9	WITHIN APP. FUNNEL 04	2947.0	69.9	1242
32	VEBI-6010	BUSHES (GROUND ELEV. = 900.2 M)	25°41'51.5237"N	091°58'16.8765"E	2962.1	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2926.3 2930.3	35.8 31.8	919
33	VEBI-9011	SHED	25°41'53.0109"N	091°58'12.4729"E	2986.0	WITHIN T.S.	2960.4	25.6	985
34	VEBI-6045	GROUP OF TREES	25°41'53.0707"N	091°58'11.6855"E	3031.6	WITHIN T.S.	2969.0	62.7	1002
35	VEBI-6046	GROUP OF TREES	25°41'42.4591"N	091°58'23.7061"E	2971.3	WITHIN T.S.	2970.3	1.0	1024
36	VEBI-5002	BUILDING	25°41'52.1652"N	091°58'09.4334"E	3006.4	WITHIN T.S.	2983.1	23.3	1069
37	VEBI-6007	BUSHES (GROUND ELEV. = 899.6 M)	25°41'44.8111"N	091°58'12.2071"E	2970.6	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2942.4 2946.3	28.2 24.3	1156
38	VEBI-6014	BAMBOO TREE (GROUND ELEV. = 897.8 M)	25°41'36.6673"N	091°58'18.7755"E	2988.7	WITHIN T.S.	2971.9	16.7	1247
39	VEBI-9008	SPOT LEVEL	25°41'41.6588"N	091°58'09.0271"E	2957.8	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2950.9 2954.9	6.9 3.0	1288
40	VEBI-8008	MOBILE ROAD TRAFFIC (ROAD ELEV.=910.4 M+5M MOBILE TRAFFIC HEIGHT)	25°41'44.2126"N	091°58'05.3642"E	3003.4	WITHIN APP. FUNNEL 04	2950.9	52.5	1308
41	VEBI-7004	ELECTRIC POLE	25°41'42.9607"N	091°58'06.7905"E	2999.5	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2951.3 2955.2	48.2 44.3	1304
42	VEBI-8007	AIRPORT BOUNDARY WALL WITH FENCING ON TOP	25°41'43.7022"N	091°58'04.7541"E	2995.9	WITHIN APP. FUNNEL 04	2952.6	43.3	1332
43	VEBI-8024	MOBILE ROAD TRAFFIC (ROAD ELEV.=909.3 M+5M MOBILE TRAFFIC HEIGHT)	25°41'42.8593"N	091°58'03.7880"E	2999.8	WITHIN APP. FUNNEL 04	2954.9	44.9	1369
44	VEBI-7003	ELECTRIC POLE	25°41'43.6422"N	091°58'04.6604"E	3009.3	WITHIN APP. FUNNEL 04	2952.9	56.4	1335
45	VEBI-9006	SPOT LEVEL	25°41'42.1721"N	091°58'06.1242"E	2983.7	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2953.6 2957.5	30.2 26.2	1334
46	VEBI-6004	GROUP OF TREES	25°41'42.5634"N	091°58'03.0690"E	3037.9	WITHIN T.S.	2958.8	79.1	1390
47	VEBI-5001	BUILDING	25°41'42.7874"N	091°58'02.3972"E	3008.3	WITHIN T.S.	2967.7	40.7	1400
48	VEBI-8004	AIRPORT BOUNDARY WALL WITH FENCING ON TOP (WALL TOP = 912.4 M)	25°41'41.9522"N	091°58'03.3497"E	2996.2	WITHIN APP. FUNNEL 04	2956.8	39.4	1396
49	VEBI-9007	L/C ROD ON LOCALIZER HUT (HUT TOP 902.4 M)	25°41'39.3906"N	091°58'06.2458"E	2969.6	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2957.5 2961.4	12.1 8.2	1392
50	VEBI-7001	ELECTRIC POLE	25°41'40.2074"N	091°58'03.2664"E	3002.4	WITHIN APP. FUNNEL 04	2959.8	42.7	1434
51	VEBI-6006	GROUP OF TREES (BAMBOO)	25°41'34.7850"N	091°58'09.7800"E	2975.9	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2960.8 2964.7	15.1 11.2	1435
52	VEBI-8002	AIRPORT BOUNDARY WALL WITH FENCING ON TOP	25°41'40.1896"N	091°58'01.8271"E	2994.6	WITHIN APP. FUNNEL 04	2961.4	33.1	1464
53	VEBI-8001	MOBILE ROAD TRAFFIC (ROAD ELEV.=910.0 M+5M MOBILE TRAFFIC HEIGHT)	25°41'40.0999"N	091°58'01.6839"E	3002.1	WITHIN APP. FUNNEL 04	2961.8	40.4	1469
54	VEBI-6002	GROUP OF TREES	25°41'39.0149"N	091°58'02.2054"E	3013.6	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2962.7 2966.7	50.9 46.9	1481
55	VEBI-9003	SPOT LEVEL	25°41'38.3537"N	091°58'02.3204"E	2986.4	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2963.7 2967.7	22.6 18.7	1492
56	VEBI-8003	MOBILE ROAD TRAFFIC (ROAD ELEV.=908.9 M+5M MOBILE TRAFFIC HEIGHT)	25°41'37.2001"N	091°58'03.1380"E	2998.5	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2964.7 2968.6	33.8 29.9	1501
57	VEBI-6003	BUSHES (GROUND ELEV. = 912.9 M)	25°41'37.1272"N	091°58'02.8513"E	3005.4	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2965.0 2969.0	40.4 36.4	1508
58	VEBI-9004	SPOT LEVEL	25°41'36.7078"N	091°58'03.1899"E	2974.2	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2965.4 2969.3	8.9 4.9	1511
59	VEBI-9002	SPOT LEVEL	25°41'36.8466"N	091°58'02.2885"E	2980.8	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2966.4 2970.3	14.4 10.5	1525
60	VEBI-6001	GROUP OF TREES	25°41'36.8003"N	091°58'01.5766"E	3013.9	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2967.0 2970.9	46.9 43.0	1540
61	VEBI-9001	SPOT LEVEL	25°41'36.0761"N	091°58'01.3937"E	2972.9	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2968.3 2972.3	4.6 0.7	1560
62	VEBI-8025	MOBILE ROAD TRAFFIC (ROAD ELEV.=906.5 M+5M MOBILE TRAFFIC HEIGHT)	25°41'36.4708"N	091°58'00.0126"E	2990.6	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2969.3 2973.2	21.3 17.4	1579
63	VEBI-6047	GROUP OF TREES	25°41'37.2736"N	091°57'58.6362"E	3010.0	WITHIN APP. FUNNEL 04	2969.6	40.4	1590
64	VEBI-5032	HOUSE	25°41'36.3687"N	091°57'59.5102"E	2985.4	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2970.3 2974.2	15.1 11.2	1591
65	VEBI-6005	GROUP OF TREES	25°41'33.2509"N	091°58'03.5660"E	2996.5	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	2970.3 2974.2	26.2 22.3	1581
66	VEBI-6048	TREE TOP ON HILLOCK	25°41'05.2725"N	091°58'03.0964"E	3138.6	WITHIN I.H S	3074.0	64.6	2305
67	VEBI-6049	TREE ON HILL (HILL TOP = 928.8 M)	25°41'06.0312"N	091°57'58.3484"E	3085.1	WITHIN T.S.	3037.2	47.9	2348
68	VEBI-6050	TREE ON HILL	25°41'03.1780"N	091°57'55.9144"E	3090.7	WITHIN T.S.	3038.2	52.5	2458
69	VEBI-6051	TREE ON HILL (HILL TOP = 946.4 M)	25°41'00.4059"N	091°57'51.4095"E	3163.9	WITHIN APP. FUNNEL 04	3035.9	128.0	2597
70	VEBI-6052	GROUP OF TREES	25°41'00.4123"N	091°57'50.3826"E	3159.3	WITHIN APP. FUNNEL 04	3036.9	122.4	2612
71	VEBI-9035	SPOT LEVEL	25°40'59.9412"N	091°57'50.5426"E	3155.7	WITHIN APP. FUNNEL 04	3037.5	118.1	2622
72	VEBI-6054	GROUP OF TREES	25°40'53.6894"N	091°57'47.2434"E	3171.1	WITHIN APP. FUNNEL 04	3051.3	119.8	2834
73	VEBI-6055	TREE ON HILL	25°40'57.2951"N	091°57'36.3255"E	3083.8	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3058.2 3062.2	25.6 21.7	2918
74	VEBI-6056	TREE ON HILL (HILL TOP = 945.1 M)	25°40'47.2900"N	091°57'38.1894"E	3146.8	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3071.7 3075.6	75.1 71.2	3136
75	VEBI-9036	ANTENNA	25°40'47.2363"N	091°57'38.2133"E	3140.2	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3071.7 3075.6	68.6 64.6	3137
76	VEBI-9037	ANTENNA	25°40'47.9460"N	091°57'36.8878"E	3130.7	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3072.0 3075.9	58.7 54.8	3140
77	VEBI-6057	TREE ON HILL	25°40'49.3075"N	091°57'32.7296"E	3092.3	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3075.0 3078.9	17.4 13.5	3174
78	VEBI-9038	ANTENNA	25°40'48.4409"N	091°57'30.7386"E	3083.8	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3078.6 3082.5	5.2 1.3	3229
79	VEBI-6058	GROUP OF TREES	25°40'40.4943"N	091°57'34.5565"E	3166.5	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3086.4 3090.4	80.1 76.1	3367
80	VEBI-6059	TREE ON HILL (HILL TOP = 955.0 M)	25°40'40.9521"N	091°57'32.5107"E	3150.4	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3088.1 3092.0	62.3 58.4	3387
81	VEBI-5034	CHURCH	25°40'45.0993"N	091°57'26.3156"E	3104.2	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3088.7 3092.7	15.4 11.5	3386
82	VEBI-6060	GROUP OF TREES	25°40'45.1617"N	091°57'25.2375"E	3134.7	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3090.0 3094.0	44.6 40.7	3403
83	VEBI-6061	GROUP OF TREES	25°40'40.3861"N	091°57'25.3705"E	3125.5	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3097.3 3101.2	28.2 24.3	3517
84	VEBI-9039	HILL	25°39'04.9140"N	091°54'39.7631"E	4166.5	WITHIN O.H.S.	3418.5	748.1	8852
85	VEBI-7024	MAST ON HILL (HILL TOP = 1642.8 M)	25°36'24.5370"N	091°54'56.1832"E	5498.0	WITHIN O.H.S.	3418.5	2079.5	12391
86	VEBI-9041	HILL	25°36'08.4673"N	091°54'33.1825"E	5252.6	WITHIN APP. FUNNEL 04	3418.5	1834.1	13146
87	VEBI-7025	MAST P & T DEPTT.	25°36'34.8114"N	091°55'10.8490"E	5613.5	WITHIN O.H.S.	3418.5	2195.0	11913
88	VEBI-9042	HILL TOP	25°39'28.4499"N	091°56'40.5925"E	3513.6	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3296.4 3265.6	217.2 248.0	6046
89	VEBI-9043	HILL TOP	25°38'02.7941"N	091°56'02.9006"E	4563.5	WITHIN O.H.S.	3418.5	1145.1	8841
90	VEBI-6062	TREE ON HILL (HILL TOP = 1337.3 M)	25°38'15.7228"N	091°55'41.0838"E	4440.2	WITHIN APP. FUNNEL 04	3418.5	1021.7	8830

SR.NO	UUID	OBJECT	LATITUDE	LONGITUDE	ELEV.IN (FT)	REMARKS	PERMISSIBLE TOP ELEV.IN(FT)	OBSTACLE IN (FT)	DIST. FROM ARP IN M.
91	VEBI-6063	TREE ON HILL (HILL TOP = 1358.6 M)	25°38'12.1023"N	091°55'56.0626"E	4513.0	WITHIN APP. FUNNEL 04	3418.5	1094.5	8694
92	VEBI-6064	TREE ON HILL (HILL TOP = 1283.3 M)	25°38'25.9225"N	091°55'10.4836"E	4264.3	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3418.5 3467.4	845.8 797.0	9100
93	VEBI-5035	WATER TANK ON HILL (HILL TOP = 1284.9M)	25°38'24.1855"N	091°55'09.4113"E	4229.2	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3418.5 3471.3	810.7 757.9	9160
94	VEBI-5036	BUILDING ON HILL	25°38'32.6956"N	091°55'07.6691"E	4193.4	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3418.5 3460.1	775.0 733.3	8993
95	VEBI-5037	BUILDING ON HILL	25°38'26.0187"N	091°54'56.2276"E	4228.9	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3418.5 3483.8	810.4 745.1	9359
96	VEBI-6065	TREE ON HILL	25°38'23.9175"N	091°54'56.9693"E	4223.6	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3418.5 3486.1	805.2 737.6	9393
97	VEBI-5038	BUILDING ON HILL	25°38'10.2224"N	091°55'11.9679"E	4243.3	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3418.5 3490.3	824.8 753.0	9448
98	VEBI-6066	TREE ON HILL	25°38'36.2928"N	091°55'49.9056"E	3863.4	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3418.5 3405.7	444.9 457.7	8171
99	VEBI-6067	TREE ON HILL	25°38'22.7336"N	091°55'59.8406"E	4067.5	WITHIN APP. FUNNEL 04	3418.5	649.0	8361
100	VEBI-6068	TREE ON HILL	25°39'25.0703"N	091°56'27.5319"E	3547.1	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3321.7 3285.9	225.4 261.2	6340
101	VEBI-6069	TREE ON HILL	25°38'16.6871"N	091°55'21.6314"E	4209.5	WITHIN APP. FUNNEL 04 WITHIN APP.04 TAKE-OFF	3418.5 3469.0	791.0 740.5	9126
102	VEBI-6033	GROUP OF TREES	25°41'48.5367"N	091°58'05.3370"E	3016.6	WITHIN T.S.	2991.0	25.6	1227
103	VEBI-9031	APPROACH LIGHT	25°41'49.8470"N	091°58'19.4676"E	2929.6	WITHIN RWY STRIP	2926.3	3.3	905
104	VEBI-9032	APPROACH LIGHT	25°41'48.3385"N	091°58'18.1163"E	2931.6	WITHIN APP. FUNNEL 04	2929.9	1.6	965
105	VEBI-6037	GROUP OF TREES	25°41'47.3710"N	091°58'04.0728"E	3012.3	WITHIN T.S.	2992.9	19.4	1277
106	VEBI-6038	GROUP OF TREES	25°41'46.2985"N	091°58'02.6642"E	3031.3	WITHIN T.S.	3012.3	19.0	1328
107	VEBI-6039	GROUP OF TREES	25°41'43.7119"N	091°58'02.1070"E	3040.2	WITHIN T.S.	2977.2	63.0	1388
108	VEBI-6072	GROUP OF TREES	25°42'30.6415"N	091°58'45.4883"E	2970.0	WITHIN T.S.	2952.9	17.1	593
109	VEBI-6026	GROUP OF TREES	25°42'22.6080"N	091°58'58.8327"E	2957.2	WITHIN T.S.	2948.3	8.9	596
110	VEBI-5067	GP HUT	25°42'31.9808"N	091°58'51.5896"E	2916.5	WITHIN RWY STRIP	2909.9	6.6	687
111	VEBI-4003	GP MAIN ANTENNA	25°42'32.3119"N	091°58'51.8955"E	2959.1	WITHIN RWY STRIP	2908.9	50.2	700
112	VEBI-4004	GP DME ANTENNA	25°42'32.4166"N	091°58'51.7556"E	2921.4	WITHIN RWY STRIP	2908.9	12.5	701
113	VEBI-6023	TREE ON HILL	25°42'38.5354"N	091°58'46.6229"E	3058.5	WITHIN T.S.	3008.0	50.5	838
114	VEBI-4005	GP MONITOR ANTENNA	25°42'34.3895"N	091°58'53.6971"E	2928.3	WITHIN RWY STRIP	2906.6	21.7	779
115	VEBI-6094	BAMBOO TREE ON HILL	25°42'40.7651"N	091°58'46.5672"E	3076.3	WITHIN T.S.	3027.4	48.9	905
116	VEBI-6095	GROUP OF TREES	25°42'37.3807"N	091°58'52.5023"E	2951.3	WITHIN T.S.	2936.5	14.8	849
117	VEBI-6073	GROUP OF TREES	25°42'41.7290"N	091°58'48.5801"E	3063.5	WITHIN T.s.	3014.6	48.9	945
118	VEBI-9026	APP LIGHT	25°42'38.9140"N	091°59'03.3771"E	2901.7	WITHIN RWY STRIP	2901.1	0.7	1041
119	VEBI-6028	BUSHES (GROUND ELEV. = 884.8 M)	25°42'37.7434"N	091°59'05.8840"E	2919.1	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	2902.0 2906.0	17.1 13.1	1056
120	VEBI-6025	GROUP OF TREES	25°42'44.8780"N	091°58'56.7102"E	2966.4	WITHIN T.S.	2957.2	9.2	1108
121	VEBI-5047	SINTEX ON BUILDING (BLDG. TOP = 923.8 M)	25°42'48.5639"N	091°58'52.6450"E	3035.3	WITHIN T.S.	3031.6	3.6	1177
122	VEBI-6074	GROUP OF TREES	25°42'48.9941"N	091°58'53.5071"E	3050.7	WITHIN T.S.	3027.1	23.6	1196
123	VEBI-6027	BUSHES	25°42'43.2893"N	091°59'02.7098"E	2916.2	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	2907.3 2911.2	8.9 4.9	1142
124	VEBI-6096	GROUP OF TREES (BAMBOO)	25°42'48.5293"N	091°59'00.8753"E	2954.2	WITHIN T.S.	2947.0	7.2	1258
125	VEBI-6075	GROUP OF TREES	25°42'53.1428"N	091°58'55.9385"E	3046.4	WITHIN T.S.	3039.5	6.9	1338
126	VEBI-6097	GROUP OF TREES	25°42'52.0617"N	091°58'59.6208"E	3002.4	WITHIN T.S.	2991.9	10.5	1343
127	VEBI-6076	GROUP OF TREES	25°42'42.3010"N	091°59'16.0711"E	2943.1	WITHIN T.S.	2931.9	11.2	1354
128	VEBI-6099	GROUP OF TREES	25°42'41.6263"N	091°59'18.1101"E	2975.5	WITHIN T.S.	2958.8	16.7	1382
129	VEBI-6077	GROUP OF TREES	25°42'52.5153"N	091°59'03.9254"E	2959.1	WITHIN T.S.	2952.2	6.9	1406
130	VEBI-6029	GROUP OF TREES	25°42'46.3945"N	091°59'19.4163"E	2963.7	WITHIN APP. FUNNEL 22	2931.2	32.5	1509
131	VEBI-6100	GROUP OF TREES	25°42'47.5478"N	091°59'20.5264"E	2954.9	WITHIN APP. FUNNEL 22	2934.2	20.7	1556
132	VEBI-6079	GROUP OF TREES (BAMBOO)	25°42'56.8006"N	091°59'19.2262"E	2957.8	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	2947.3 2951.3	10.5 6.6	1746
133	VEBI-6103	GROUP OF TREES	25°43'11.1849"N	091°59'17.4037"E	2993.3	WITHIN T.S.	2981.4	11.8	2090
134	VEBI-6082	GROUP OF TREES ON HILL	25°43'27.0749"N	091°59'40.4356"E	3032.0	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	3019.2 3023.1	12.8 8.9	2847
135	VEBI-6084	GROUP OF TREES	25°43'33.0706"N	091°59'38.2686"E	3027.1	WITHIN APP. FUNNEL 22	3026.1	1.0	2966
136	VEBI-6085	GROUP OF TREES	25°43'34.3663"N	091°59'38.7406"E	3034.3	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	3028.7 3032.6	5.6 1.6	3007
137	VEBI-6086	GROUP OF TREES	25°43'35.3531"N	091°59'38.9143"E	3034.9	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	3030.3 3034.3	4.6 0.7	3035
138	VEBI-7037	MAST	25°43'42.5117"N	091°59'31.6503"E	3133.0	WITHIN I.H.S	3074.0	59.1	3128
139	VEBI-6087	GROUP OF TREES	25°43'33.8988"N	091°59'54.6255"E	3056.6	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	3046.4 3050.3	10.2 6.2	3254
140	VEBI-6088	GROUP OF TREES	25°43'33.3579"N	091°59'55.6208"E	3069.7	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	3046.7 3050.7	23.0 19.0	3259
141	VEBI-6105	GROUP OF TREES	25°43'32.7983"N	091°59'57.3937"E	3089.4	WITHIN APP. FUNNEL 22 WITHIN APP.22 TAKE-OFF	3047.7 3051.7	41.7 37.7	3277
142	VEBI-6090	GROUP OF TREES ON HILL	25°45'38.5474"N	092°01'11.6736"E	3436.5	WITHIN APP. FUNNEL 22	3388.6	47.9	7622
143	VEBI-6091	GROUP OF TREES ON HILL	25°45'58.8561"N	092°01'27.1350"E	3603.5	WITHIN APP. FUNNEL 22	3418.5	185.0	8381
144	VEBI-6092	GROUP OF TREES ON HILL GL=1187.3	25°46'13.5091"N	092°01'09.6613"E	3926.0	WITHIN O.H.S.	3418.5	507.6	8514
145	VEBI-5060	GROUP OF TREES ON HILL GL=1153.5	25°46'13.8795"N	092°01'24.8942"E	3858.1	WITHIN APP. FUNNEL 22	3418.5	439.7	8738
146	VEBI-5061	HOUSE ON HILL	25°46'10.7678"N	092°01'31.5640"E	3675.4	WITHIN APP. FUNNEL 22	3418.5	256.9	8756
147	VEBI-6093	GROUP OF TREES ON HILL GL=1178.9	25°46'34.3523"N	092°01'30.8554"E	3919.2	WITHIN APP. FUNNEL 22	3418.5	500.7	9364
148	VEBI-7035	CELLPHONE MAST ON HILL	25°47'22.8701"N	092°01'51.1277"E	4196.4	WITHIN O.H.S.	3418.5	777.9	10941
149	VEBI-6112	GROUP OF TREES ON HILL	25°46'07.3597"N	092°01'25.4089"E	3667.2	WITHIN APP. FUNNEL 22	3418.5	248.7	8575
150	VEBI-9066	GROUND LEVEL	25°45'42.8723"N	092°00'57.3579"E	3394.2	WITHIN APP. FUNNEL 22	3376.5	17.7	7525
151	VEBI-6031	GROUP OF TREES	25°42'43.2048"N	091°59'13.7794"E	2972.6	WITHIN APP. FUNNEL 22	2919.8	52.8	1329
152	VEBI-6035	GROUP OF TREES ON HILL	25°42'40.5289"N	091°58'49.0680"E	3028.7	WITHIN T.S.	2999.5	29.2	912
153	VEBI-9033	LC ROD ON MET. ANTENNA	25°42'27.2525"N	091°58'58.6936"E	2927.0	WITHIN RWY STRIP	2908.9	18.0	684
154	VEBI-6040	GROUP OF TREES	25°42'27.8787"N	091°59'01.6446"E	2968.0	WITHIN T.S.	2924.4	43.6	757
155	VEBI-6041	GROUP OF TREES	25°42'41.8207"N	091°59'12.5534"E	2984.7	WITHIN APP. FUNNEL 22	2916.2	68.6	1274
156	VEBI-6113	TREE ON HILL	25°44'44.0949"N	091°58'48.4368"E	3989.4	WITHIN I.H.S.	3074.0	915.4	4692
157	VEBI-6114	TREE ON HILL	25°43'36.1433"N	091°57'50.0062"E	4140.3	WITHIN I.H.S.	3074.0	1066.3	2961
158	VEBI-6115	TREE ON HILL	25°42'32.9576"N	091°55'23.3478"E	4465.1	WITHIN C.S.	3255.7	1209.4	5551
159	VEBI-9068	HILL	25°37'52.5850"N	091°57'43.8955"E	4448.7	WITHIN O.H.S.	3418.5	1030.2	8134
160	VEBI-9069	HILL	25°40'09.0698"N	091°58'56.5281"E	3766.3	WITHIN I.H.S.	3074.0	692.3	3801
161	VEBI-9070	HILL	25°37'34.0147"N	092°00'20.0276"E	3943.4	WITHIN O.H.S.	3418.5	525.0	8982
162	VEBI-9071	HILL	25°40'34.4125"N	092°00'12.0657"E	3415.2	WITHIN I.H.S.	3074.0	341.2	3926
163	VEBI-9072	HILL	25°42'44.8547"N	092°00'27.1153"E	3113.3	WITHIN I.H.S.	3074.0	39.4	3126
164	VEBI-6116	TREE ON HILL	25°43'56.8989"N	092°01'36.4587"E	3572.7	WITHIN C.S.	3229.8	342.9	5862
165	VEBI-5064	OVER HEAD WATER TANK	25°41'57.8243"N	091°56'14.6321"E	3487.4	WITHIN I.H.S.	3074.0	413.4	4106
166	VEBI-6117	TREE ON HILL	25°43'29.4037"N	092°01'12.5725"E	3418.5	WITHIN I.H.S.	3074.0	344.5	4852
167	VEBI-6118	TREE ON HILL	25°42'23.5118"N	091°59'43.8230"E	3179.0	WITHIN I.H.S.	3074.0	105.0	1786
168	VEBI-6119	TREE ON HILL	25°41'37.4315"N	091°59'21.1020"E	3284.0	WITHIN I.H.S.	3074.0	210.0	1537
169	VEBI-9075	HILL TOP	25°46'47.8695"N	091°56'57.5199"E	3448.0	WITHIN O.H.S.	3418.5	29.5	8973
170	VEBI-9077	HILL TOP	25°47'23.0183"N	092°01'44.2583"E	4052.4	WITHIN O.H.S.	3418.5	633.9	10853
171	VEBI-9079	HILL TOP	25°44'06.1203"N	091°57'07.7638"E	3776.1	WITHIN C.S.	3105.8	670.3	4376
172	VEBI-9080	HILL TOP	25°42'53.8383"N	091°56'54.6985"E	3776.1	WITHIN I.H.S.	3074.0	702.1	3236
173	VEBI-9081	HILL TOP	25°41'27.8442"N	091°57'06.3805"E	3224.9	WITHIN I.H.S.	3074.0	150.9	2967
174	VEBI-9083	HILL TOP	25°40'38.4213"N	091°59'26.4219"E	3448.0	WITHIN I.H.S.	3074.0	374.0	3139
175	VEBI-5065	HUT ON HILL TOP	25°40'33.1779"N	091°58'25.4361"E	3218.3	WITHIN I.H.S.	3074.0	144.4	3066
176	VEBI-9088	HILL TOP	25°39'57.6326"N	092°00'22.6193"E	3320.0	WITHIN C.S.	3217.7	102.4	5006
177	VEBI-6123	TREE ON HILL	25°40'38.8281"N	091°59'46.2496"E	3609.8	WITHIN I.H.S.	3074.0	535.8	3389
178	VEBI-6120	GROUP OF TREES	25°40'57.0095"N	091°55'16.8865"E	3492.3	WITHIN C.S.	3301.7	190.6	6141
179	VEBI-7039	CELLPHONE MAST	25°40'57.5884"N	091°55'18.8215"E	3570.1	WITHIN C.S.	3292.5	277.6	6084
180	VEBI-7040	CELLPHONE MAST ON HILL	25°42'31.1606"N	091°55'17.8191"E	4542.2	WITHIN C.S.	3278.0	1264.2	5698
181	VEBI-7041	CELLPHONE MAST ON HILL	25°42'31.9859"N	091°55'25.8265"E	4530.4	WITHIN C.S.	3243.6	1286.8	5479
182	VEBI-6121	TREE ON HILL	25°43'22.7714"N	091°57'29.4863"E	4007.4	WITHIN I.H.S.	3074.0	933.4	2959
183	VEBI-6122	TREE ON HILL	25°44'00.6270"N	091°58'11.6741"E	4042.8	WITHIN I.H.S.	3074.0	968.9	3448
184	VEBI-9040	HILL	25°36'13.7925"N	091°52'45.7168"E	4744.0	WITHIN APP. FUNNEL 04	3418.5	1325.5	14815
185	VEBI-9045	HILL TOP	25°37'19.3320"N	091°53'36.9068"E	4432.3	WITHIN APP. FUNNEL 04	3418.5	1013.8	12365

LEGEND	
AERODROME REFERENCE POINT 25°42'11.7857"N 091°58'41.0877"E	⊕
TREE OR SHRUB	♣
POLE,TOWER,SPIRE,ANTENNA, CHIMNEY ETC.	⊙
POLE,TOWER,SPIRE,ANTENNA ON BUILDING	⊡
BUILDING OR LARGE STRUCTURE	■
ANTENNA ON HILL	△
TEMPLE ON HILL	⚑
TREE ON HILL	▲
WDI	▷
ROAD	═
RAIL TRACK	┼┼┼
WATER BODIES	🟦
TEMPLE	⚑
O.H.W.T.	○

ORDER OF ACCURACY	
TAKE-OFF AND APPROACH AREAS	
HORIZONTAL	REMARK
5M	AT POINT OF ORIGIN INCREASING AT A RATE OF 1 PER 500.
VERTICAL	REMARK
0.5M	IN THE FIRST 300M AND INCREASING AT A RATE OF 1 PER 1000.
OTHER AREAS	
HORIZONTAL	REMARK
5M	WITHIN 5000M OF THE ARP AND 12M BEYOND THAT AREA.
VERTICAL	REMARK
1M	WITHIN 1500M OF THE ARP INCREASING AT A RATE OF 1 PER 1000.

SCALE 1:20000

275 0 275 550 825 1100 1375 METRE
825 0 825 1650 2475 3300 4125 FEET

NOTE:
1. OBSTACLES SHOWN ARE THOSE WHICH PENETRATE THE SURFACES SPECIFIED IN ANNEX 14, VOL-1, CHAPTER-4 & GSR.
2. TORA FOR RWY 04 IS 1829M.
TORA FOR RWY 22 IS 1829M.
3. ALL OBSTACLES ARE SHOWN IN THE CHART BASED ON AERONAUTICAL SURVEY MAY 2023.
4. TOPOGRAPHIC FEATURES SOURCE : VERTICAL SIGNIFICANCE CHART.

AMENDMENT RECORD		
NO.	DATE	ENTERED BY

AERONAUTICAL INFORMATION UPTO: JAN, 2024

DWG. NO: AAI/26-TYPE B/BARAPANI/2024